
HARDSCAPE PRODUCTS

www.hardscapeproducts.co.uk
Telephone: 01204 565 500 **Email:** enq@hardscape.co.uk
Hardscape Products Ltd., Eagley House, Deakins Business Park, Egerton, Bolton, Lancashire, BL7 9RP

Argyle
Whinstone

A hard, attractive and versatile quartz-dolerite material used for hundreds of years. It is suitable for paving as well as for kerbs, setts, channels and walling.

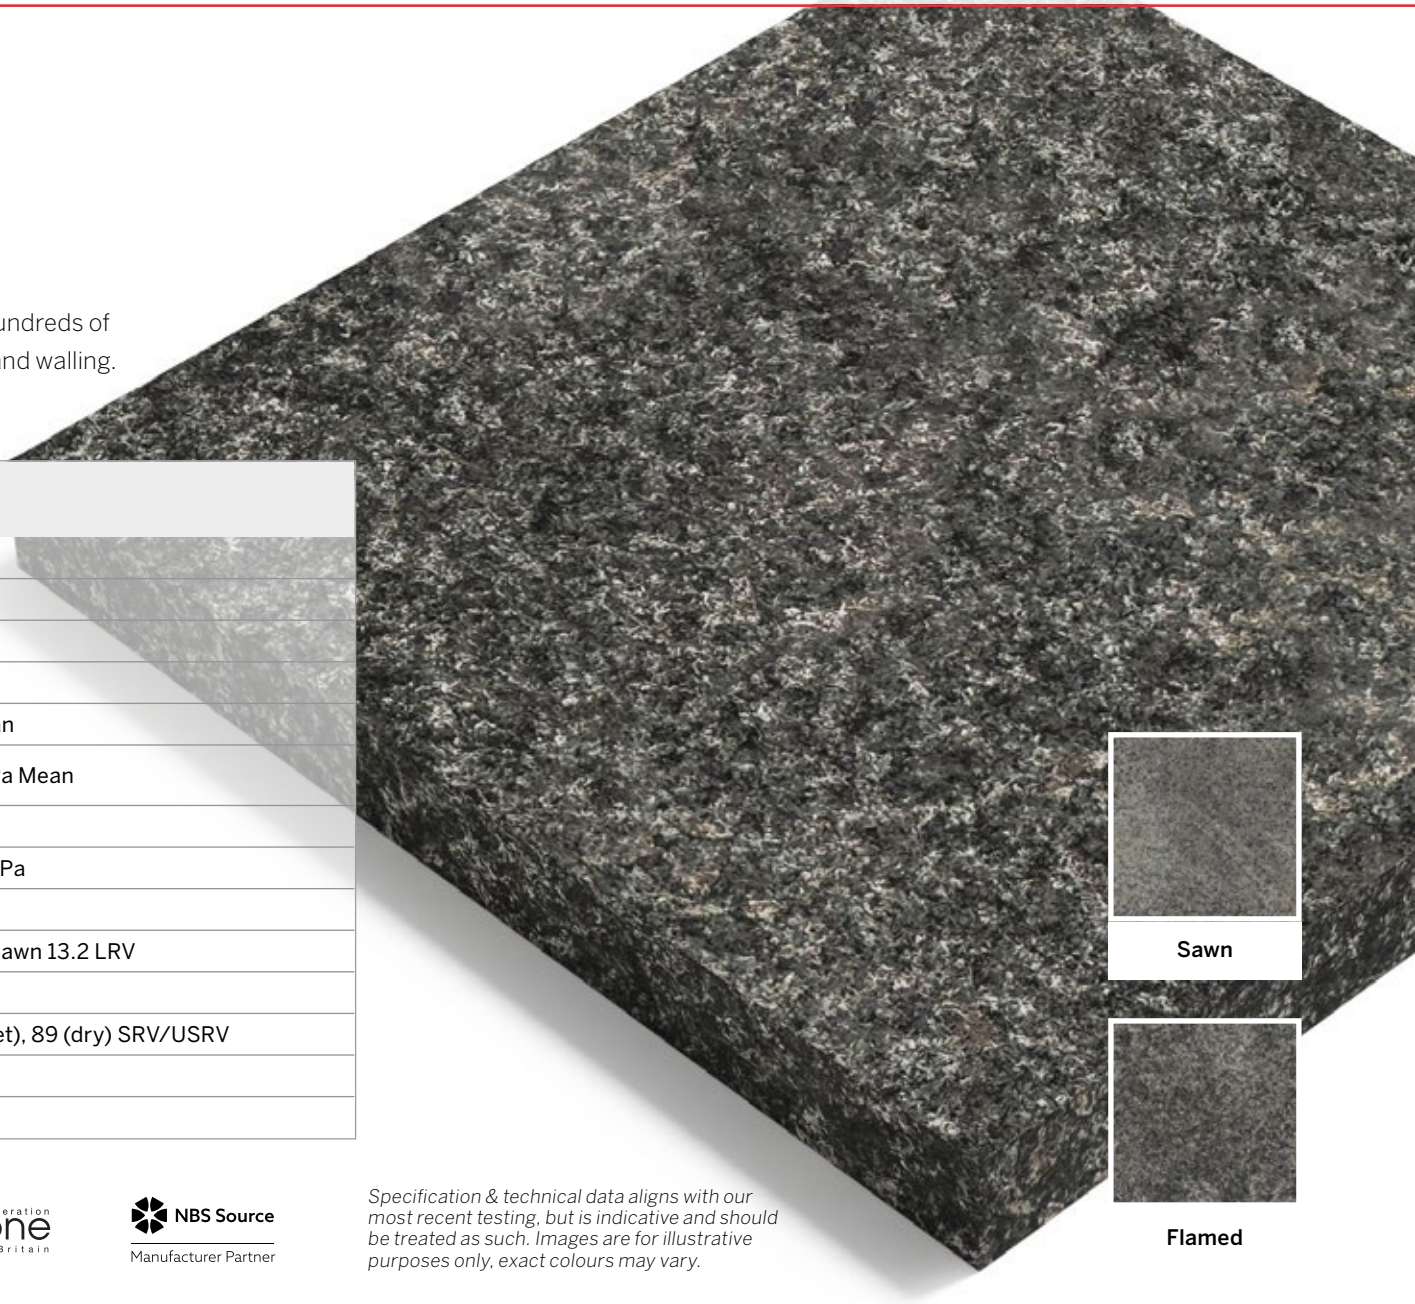

SPECIFICATION	SKU: GRA-SCO-ARG-002	
Material	Granite	
Finish	Flamed, Sawn	
Density	-	2990 kg/m³
GWP (total) kgCO2e	ISO 14025 / EN 15804	0.123 per kg
Compressive Strength	BS EN 1926:2006	209 MPa Mean
Compressive Strength (Freeze/Thaw Resistance)	BS EN 1926:2006	209 / 190 MPa Mean
PPV (Before/After)	BS EN 7932:2003	NPD
Flexural Freeze/Thaw	BS EN 12371:2010	23.9 / 22.9 MPa
Flexural Strength	BS EN 12372:2006	25 MPa LEV
Light Reflectance Value	BS EN 84369:2008	Flamed 9.1 : Sawn 13.2 LRV
Open Porosity	BS EN 1936:2006	0.5%
Slip Resistance	BS EN 13036-4, BS 7976	Flamed 71 (wet), 89 (dry) SRV/USRV
Water Absorption	BS EN 13755:2008	0.3%
Abrasion Resistance	BS EN 14157:2004	17mm

Sawn

Flamed

CfA ISO 14001 Quality Management UKAS 0120

CfA ISO 9001 Environmental Management UKAS 0120

Ethical Stone Register Declaration Level

Federation Stone Great Britain

NBS Source Manufacturer Partner

Specification & technical data aligns with our most recent testing, but is indicative and should be treated as such. Images are for illustrative purposes only, exact colours may vary.