
HARDSCAPE PRODUCTS

www.hardscapeproducts.co.uk
Telephone: 01204 565 500 **Email:** enq@hardscape.co.uk
Hardscape Products Ltd., Eagley House, Deakins Business Park, Egerton, Bolton, Lancashire, BL7 9RP

Mara

Destri

Suitable for all applications including paving, steps, setts, walling, tactiles and cladding.

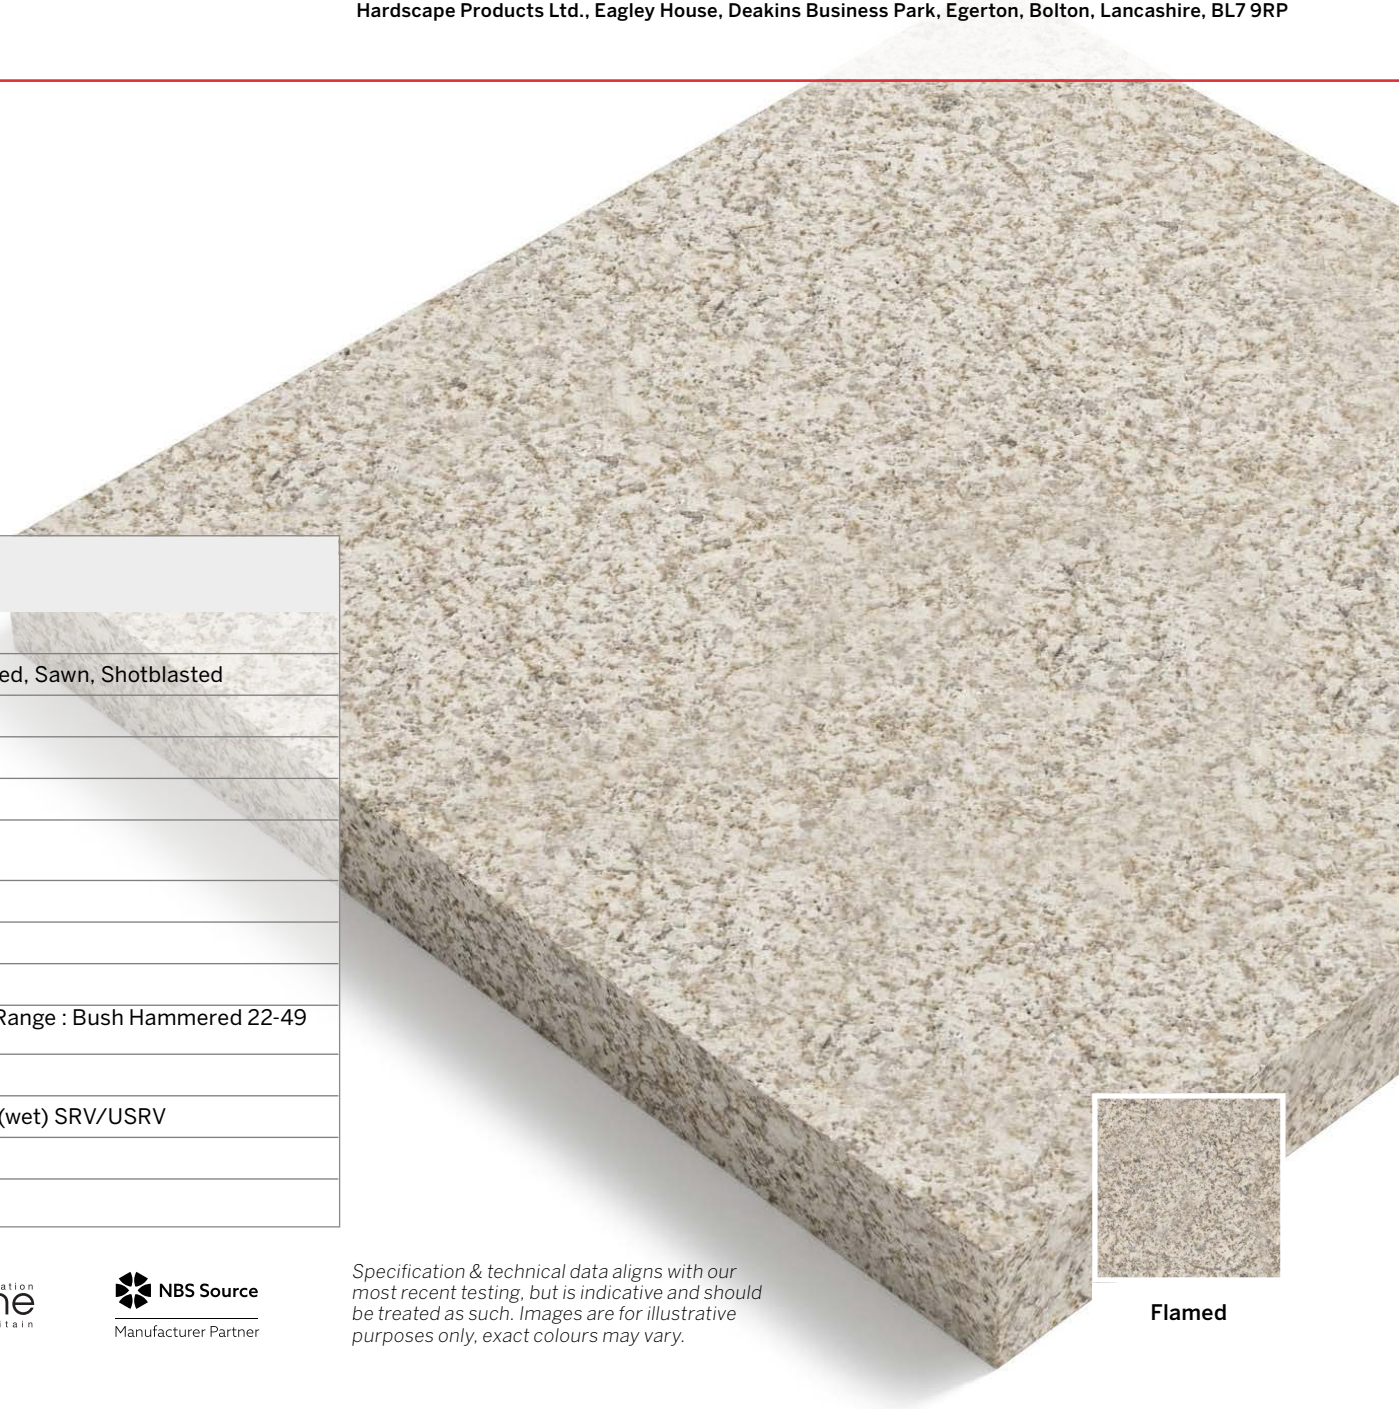

SPECIFICATION	SKU: GRA-POR-MAR-065	
Material	Granite	
Finish	Bush Hammered, Flamed, Honed, Polished, Sawn, Shotblasted	
Density	-	2510 kg/m³
GWP (total) kgCO2e	ISO 14025 / EN 15804	0.035 per kg
Compressive Strength	BS EN 1926:2006	91 MPa LEV
Compressive Strength (Freeze/Thaw Resistance)	BS EN 1926:2006	NPD
PPV (Before/After)	BS EN 7932:2003	NPD
Flexural Freeze/Thaw	BS EN 12371:2010	NPD
Flexural Strength	BS EN 12372:2006	10.6 MPa LEV
Light Reflectance Value	BS EN 84369:2008	Flamed 23-46 Range : Bush Hammered 22-49 Range LRV
Open Porosity	BS EN 1936:2006	NPD
Slip Resistance	BS EN 13036-4, BS 7976	Unpolished 56 (wet) SRV/USRV
Water Absorption	BS EN 13755:2008	2.8%
Abrasion Resistance	BS EN 14157:2004	22mm

CfA ISO 14001 Quality Management UKAS 0120

CfA ISO 9001 Environmental Management UKAS 0120

Ethical Stone Register Declaration Level

Federation Stone Great Britain

NBS Source Manufacturer Partner

Specification & technical data aligns with our most recent testing, but is indicative and should be treated as such. Images are for illustrative purposes only, exact colours may vary.

Flamed