HARDSCAPE PRODUCTS


www.hardscapeproducts.co.uk
Telephone: 01204 565 500 **Email:** enq@hardscape.co.uk
Hardscape Products Ltd., Eagley House, Deakins Business Park, Egerton, Bolton, Lancashire, BL7 9RP

Natural Stone / Limestone / England / Portland | Stonehills Whitbed

Portland

Stonehills Whitbed

Creamy/white that mellows to grey/white over time, used for external and internal paving, cladding, copings and bespoke carvings, plinths and sculpture work.

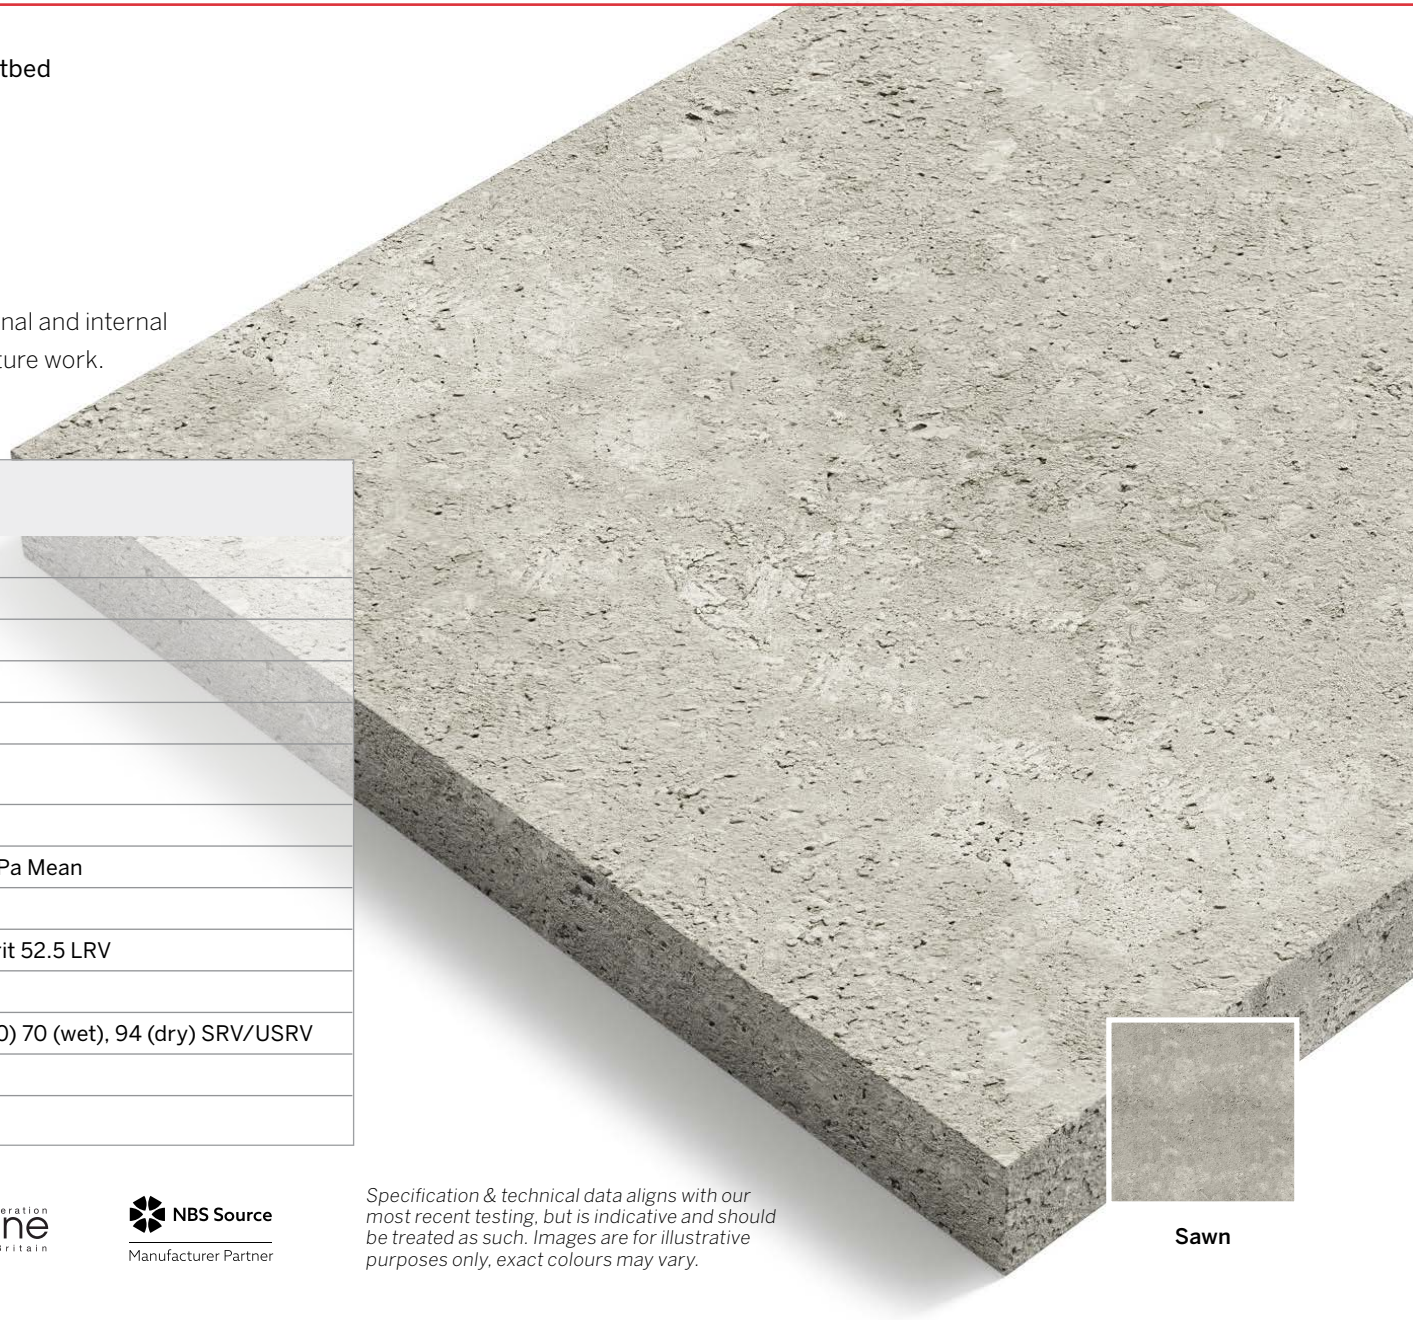

SPECIFICATION	SKU: LIM-ENG-POR-024	
Material	Limestone	
Finish	Sawn	
Density	-	2101 kg/m³
GWP (total) kgCO2e	ISO 14025 / EN 15804	0.045 per kg
Compressive Strength	BS EN 1926:2006	25 MPa LEV
Compressive Strength (Freeze/Thaw Resistance)	BS EN 1926:2006	-
PPV (Before/After)	BS EN 7932:2003	-
Flexural Freeze/Thaw	BS EN 12371:2010	6.18 / 4.05 MPa Mean
Flexural Strength	BS EN 12372:2006	4.4 MPa LEV
Light Reflectance Value	BS EN 84369:2008	Sawn & 50-Grit 52.5 LRV
Open Porosity	BS EN 1936:2006	22.2%
Slip Resistance	BS EN 13036-4, BS 7976	Sawn (Grit 120) 70 (wet), 94 (dry) SRV/USRV
Water Absorption	BS EN 13755:2008	7.29%
Abrasion Resistance	BS EN 14157:2004	23.1 mm

CfA ISO 14001 Quality Management UKAS 0120

CfA ISO 9001 Environmental Management UKAS 0120

Ethical Stone Register Declaration Level

Federation Stone Great Britain

NBS Source Manufacturer Partner

Specification & technical data aligns with our most recent testing, but is indicative and should be treated as such. Images are for illustrative purposes only, exact colours may vary.

Sawn