HARDSCAPE PRODUCTS


www.hardscapeproducts.co.uk
Telephone: 01204 565 500 **Email:** enq@hardscape.co.uk
Hardscape Products Ltd., Eagley House, Deakins Business Park, Egerton, Bolton, Lancashire, BL7 9RP

Natural Stone / Porphyry /Italy / Prima Porphyry | Violet Mix

Prima Porphyry

Grey Mix

A mineralogical content creates two dominant tones of grey-brown and grey-green. Used in various ways widely across Europe and the UK.

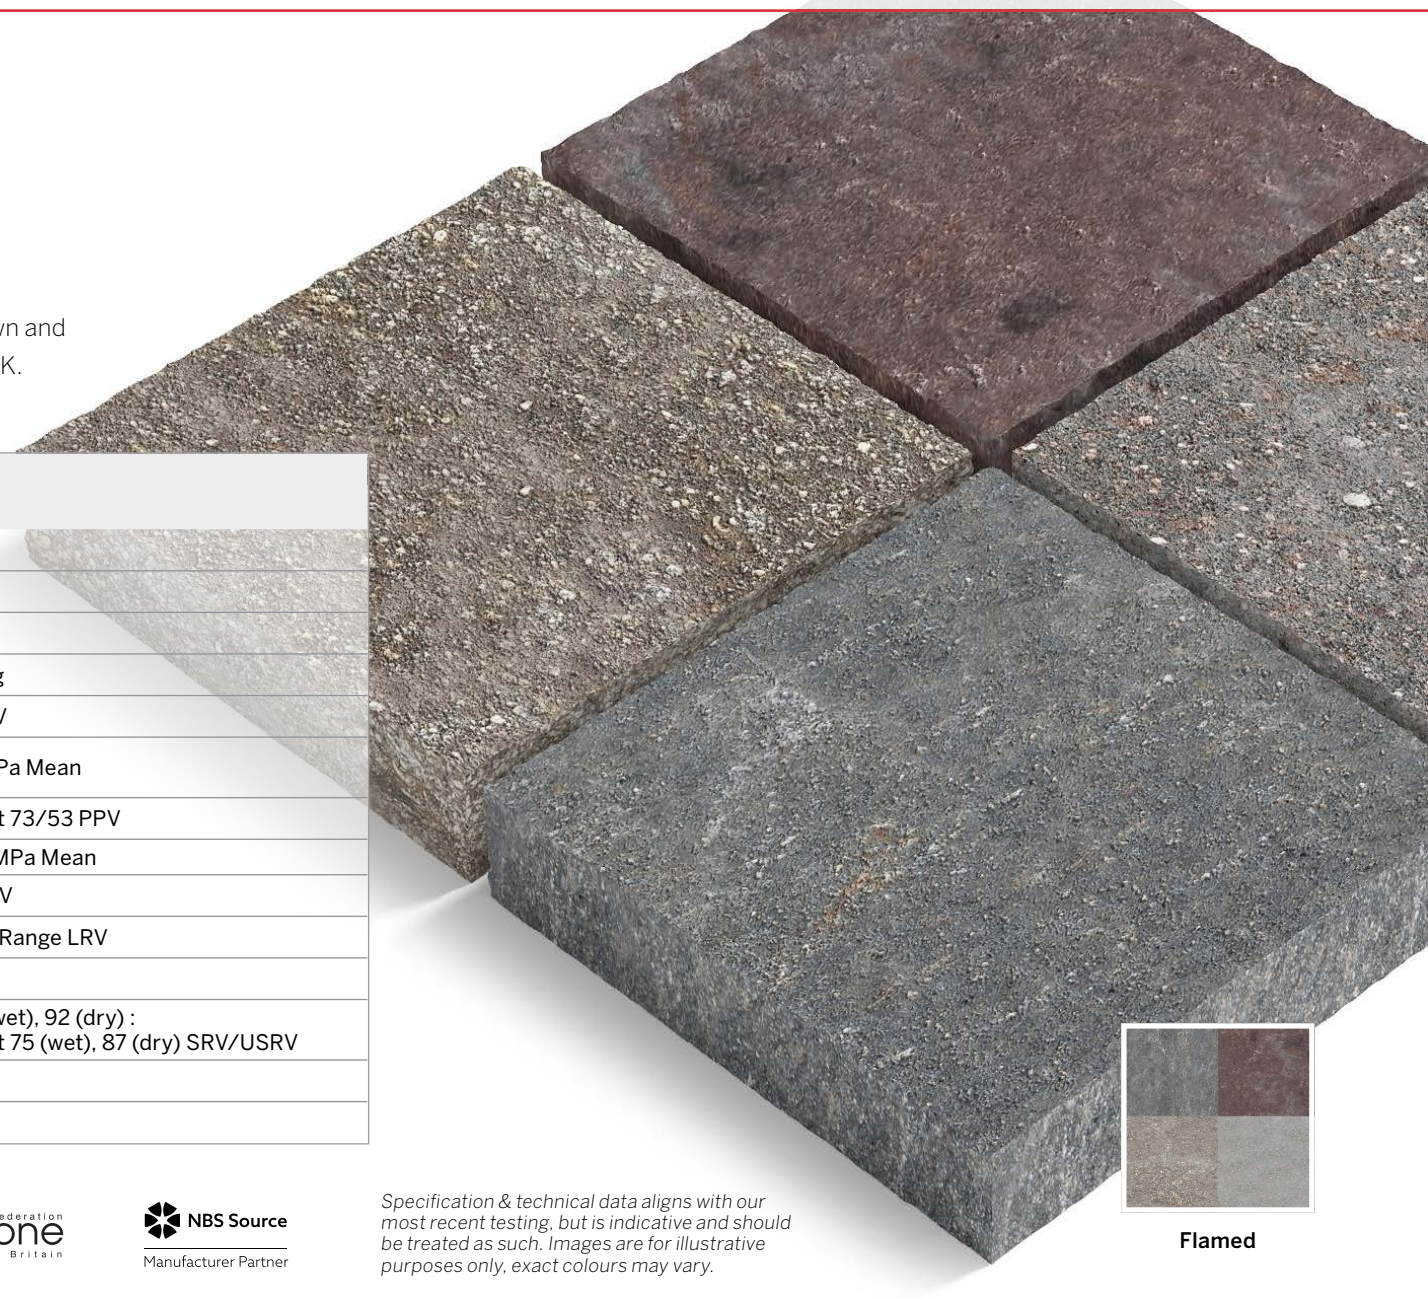

SPECIFICATION	SKU: POR-ITA-PPO-002	
Material	Porphyry	
Finish	Flamed, Honed, Polished, Sawn	
Density	-	2568 kg/m³
GWP (total) kgCO2e	ISO 14025 / EN 15804	0.248 per kg
Compressive Strength	BS EN 1926:2006	146 MPa LEV
Compressive Strength (Freeze/Thaw Resistance)	BS EN 1926:2006	185 / 194 MPa Mean
PPV (Before/After)	BS EN 7932:2003	Natural Cleft 73/53 PPV
Flexural Freeze/Thaw	BS EN 12371:2010	22.8 / 21.8 MPa Mean
Flexural Strength	BS EN 12372:2006	21.6 MPa LEV
Light Reflectance Value	BS EN 84369:2008	Riven 10-26 Range LRV
Open Porosity	BS EN 1936:2006	2.28%
Slip Resistance	BS EN 13036-4, BS 7976	Flamed 71 (wet), 92 (dry) : Natural Cleft 75 (wet), 87 (dry) SRV/USRV
Water Absorption	BS EN 13755:2008	0.9%
Abrasion Resistance	BS EN 14157:2004	15mm

CfA ISO 14001 Quality Management UKAS 0120

CfA ISO 9001 Environmental Management UKAS 0120

Ethical Stone Register Declaration Level

Federation Stone Great Britain

NBS Source Manufacturer Partner

Specification & technical data aligns with our most recent testing, but is indicative and should be treated as such. Images are for illustrative purposes only, exact colours may vary.

Flamed