Civils & Highways / Active Travel Kerbs / Highway / Highway 130-150

Highway 130-150x250 VB


130-150x250 VB | Return 3-way | L-500 | 135° | Left | Half-Battered | VBVB

SPECIFICATION

Highway 130-150x250 VB | 130-150x250 VB | Return 3-way | L-500 | 135° | Left | Half-Battered | VBVB

SKU: ATK-HWA-006-5571

Material	Concrete, Kellen
Finish	Standard Wet Cast, Optiflex, Lavaro
Size	130-150(w) x 250(d) x 500(l)
Weight Per Unit	70kg
Manufacturing Standard	BS EN 1340:2003
Density	2350 kg/m³
GWP (total) kgCO2e	7.46 kgCO2e/unit
Dutch Ref.	DRIEWEGBAND-HOEK-13-15x25_15x15xL50-135°-VB-LINKS
Type	Return 3-way
End Style	VBVB
Profile	130-150x250
Position	Left
Face	Half-Battered
Face Angle	81°
Return Angle	135°
Radius	-
Number per 360	-
Slope Angle	-
Slope Gradient	-

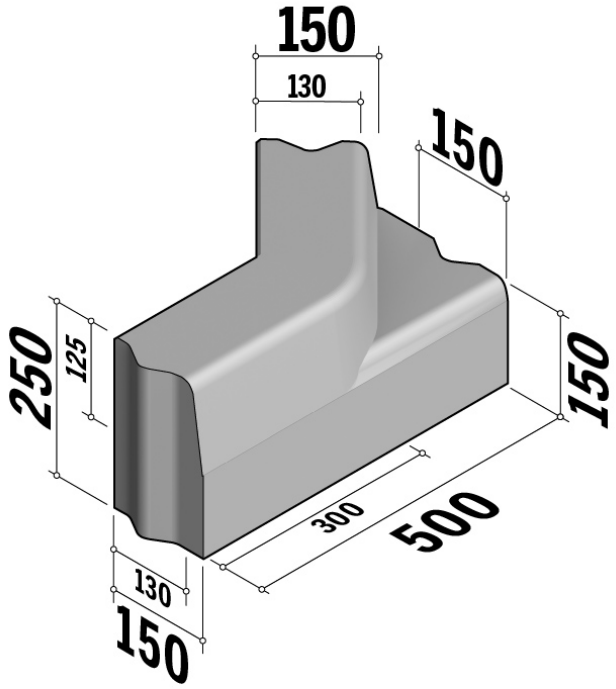

Active Travel Kerbs are available in a range of colours, finishes and materials.

Specification & technical data is indicative and subject to change. Images are for illustrative purposes only, details may vary. Some data may vary according to colour / material / finish variation.