Civils & Highways / Active Travel Kerbs / Highway / Highway 580-600

Highway 580-600x250

580-600x250 | Return Radial | to 280-400x250 | Internal | 90° | 0.2m | Half-Battered | VB

SPECIFICATION

Highway 580-600x250 | 580-600x250 | Return Radial | to 280-400x250 | Internal | 90° | 0.2m | Half-Battered | VB

SKU: ATK-HWT-001-6530

Material	Concrete, Kellen
Finish	Standard Wet Cast, Lavaro, Metallo
Size	580-600(w) x 250(d)
Weight Per Unit	260kg
Manufacturing Standard	BS EN 1340:2003
Density	2350 kg/m³
GWP (total) kgCO2e	27.7 kgCO2e/unit
Dutch Ref.	HOEKBLOKKEN-58-60x25_28-40x25-0.2m-90°-VB-inw
Type	Return Radial Internal
End Style	VB
Profile	580-600x250
Position	-
Face	Half-Battered
Face Angle	81°
Return Angle	90°
Radius	0.2m
Number per 360	-
Slope Angle	-
Slope Gradient	-

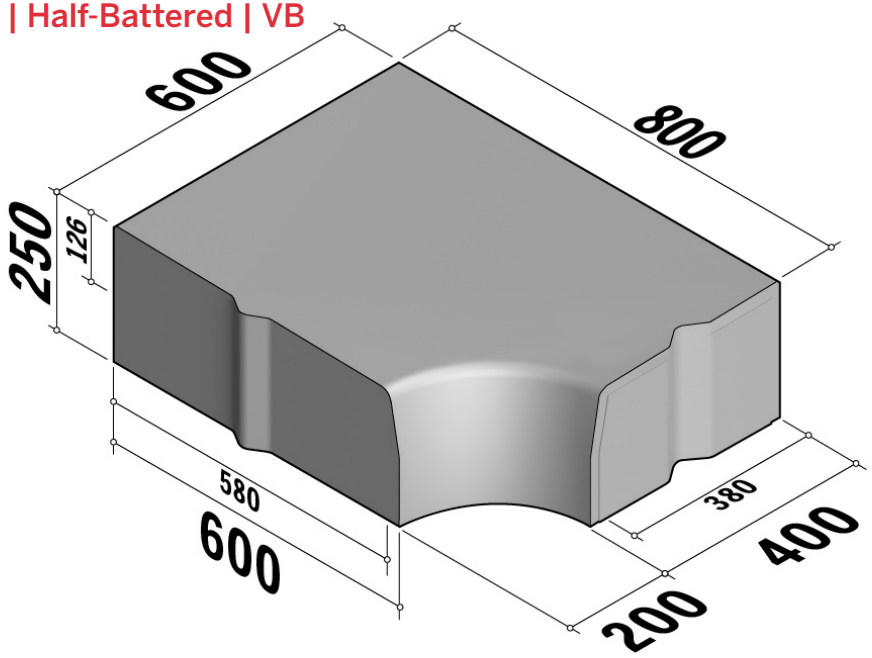

Active Travel Kerbs are available in a range of colours, finishes and materials.

Specification & technical data is indicative and subject to change. Images are for illustrative purposes only, details may vary. Some data may vary according to colour / material / finish variation.