CREATIVE LANDSCAPING WORKS


074 920 5039
info@creativelandscapingworks.com
www.creativelandscapingworks.com

kellen from HARDSCAPE

Manufactured Paving / Kellen / Double XL Slabs

# Double XL Liquid Tight

## Commercial Environment Reinforced | 1995x995x180

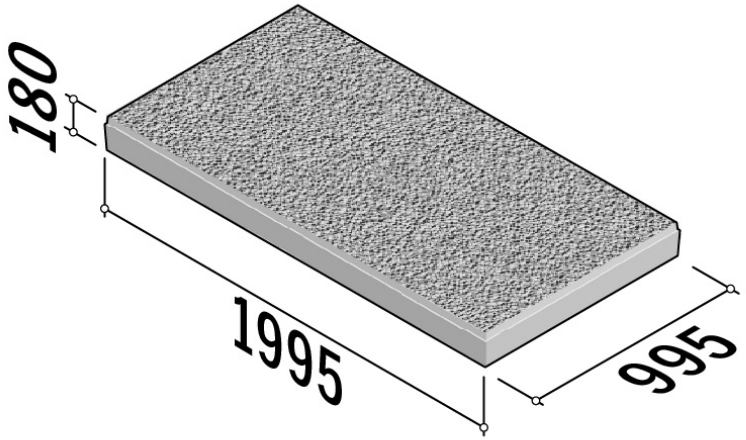


### SPECIFICATION

**Double XL Liquid Tight | Commercial Environment Reinforced | 1995x995x180**

**SKU:** KEL-SLA-DXT-010

| | |
|---|---|
| **Material** | Concrete |
| **Finish** | RAS Anti-Slip DXL |
| **Size** | 1995(w) x 995(l) x 180(d) |
| **Weight Per Unit** | 868kg |
| **Manufacturing Standard** | BS EN 1338:2003 |
| **Density** | 2350 kg/m³ |
| **GWP (total) kgCO2e** | 92.49 kgCO2e/unit |
| **Dutch Ref.** | BEDRIJFSMILIEU VLOERPLAAT CONSTRUCTIEF-199.5x99.5x18 |
| **Position** | - |
| **Radius** | - |
| **Edge Style** | 5x5mm |
| **Fitted With** | Without lifting tubes, installation via vacuum lifting only. |
| **Further Information** | VOSB load class 600+; Axle Loads 25 tonnes; Forklift (solid tires) 14.5 tonnes; Forklift (pneumatic tires) 14.5 tonnes; Point loads 10.5 tonnes |

Available in a range of colours



*Specification & technical data is indicative and subject to change. Images are for illustrative purposes only, details may vary. Some data may vary according to colour / material / finish variation.*