CREATIVE LANDSCAPING WORKS

074 920 5039
info@creativelandscapingworks.com
www.creativelandscapingworks.com

kellen from HARDSCAPE

Manufactured Paving / Kellen / Double XL Slabs

Double XL Liquid Tight

Stabilo-W Connector | 1995x995x180

Galvanized steel coupling edge (edge strip). Matching coupling material available in the form of wedges, crosses, and T-pieces.

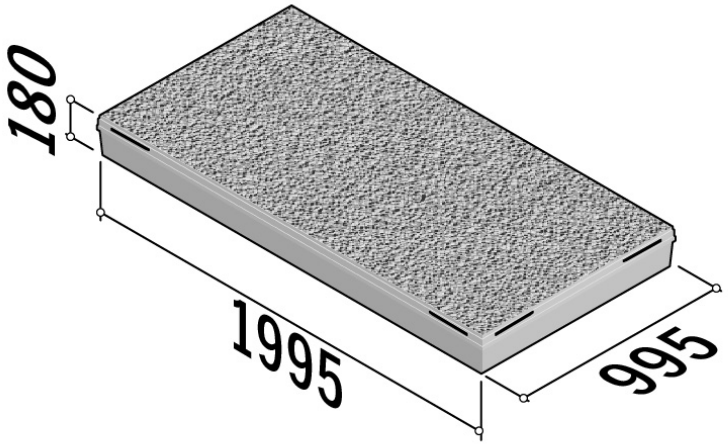

SPECIFICATION

Double XL Liquid Tight | Stabilo-W Connector | 1995x995x180
SKU: KEL-SLA-DXT-020

Material	Concrete
Finish	RAS Anti-Slip DXL
Size	1995(w) x 995(l) x 180(d)
Weight Per Unit	892kg
Manufacturing Standard	BS EN 1338:2003
Density	2350 kg/m³
GWP (total) kgCO2e	95.05 kgCO2e/unit
Dutch Ref.	STABILO-W® KOPPELPLAAT-199.5x99.5x18
Position	-
Radius	-
Edge Style	Galvanized steel coupling edge (edge strip)
Fitted With	Without lifting tubes, installation via vacuum lifting only.
Further Information	Double mesh non-structural reinforcement. VOSB load class 600; Axle Loads up to 20 tonnes; Forklift (solid tires) 7.5 tonnes; Forklift (pneumatic tires) 9 tonnes; Point loads 5 tonnes

Available in a range of colours

Specification & technical data is indicative and subject to change. Images are for illustrative purposes only, details may vary. Some data may vary according to colour / material / finish variation.