LAUREL & HARDY

Laurel & Hardy is the result of a combination of a litter bin and ashtray in the form of two cylinders with different radii, for indoor or outdoor installation.

Concrete | ∅ 48 cm/max | 240 kg | 70 L

Update 20.11.2025



Miguel Milá + Gonzalo Milá 2008

Escofet by Molins

LAUREL & HARDY

ORIGIN

The comedy duo from the American post-war film era give their name to a combination of a slim ashtray and a larger litter bin, in a clear reference to the physical contrast between both actors.

DESIGN


Both elements have a large capacity and can be installed in spaces for intensive use, both indoors and outdoors. The litter bin has a plastic bag fixed by an articulated stainless steel ring to the hinge of the lid, while the ashtray container is detachable and has an articulated part that allows its content to be emptied into the bin without becoming detached from the whole.

MATERIAL

Moulded concrete with an etched and waterproofed finish and in the Escofet catalogue standard chart colour. Forge Black, Textured Silver or Cor-ten effect coated finish cast aluminium lids and accessories.

INSTALLATION


Both cylinders are attached to each other by two screw pins. Both Laurel and Hardy have an anchor to fix them to the paving, but the Hardy bin can be installed so that it is self-standing.

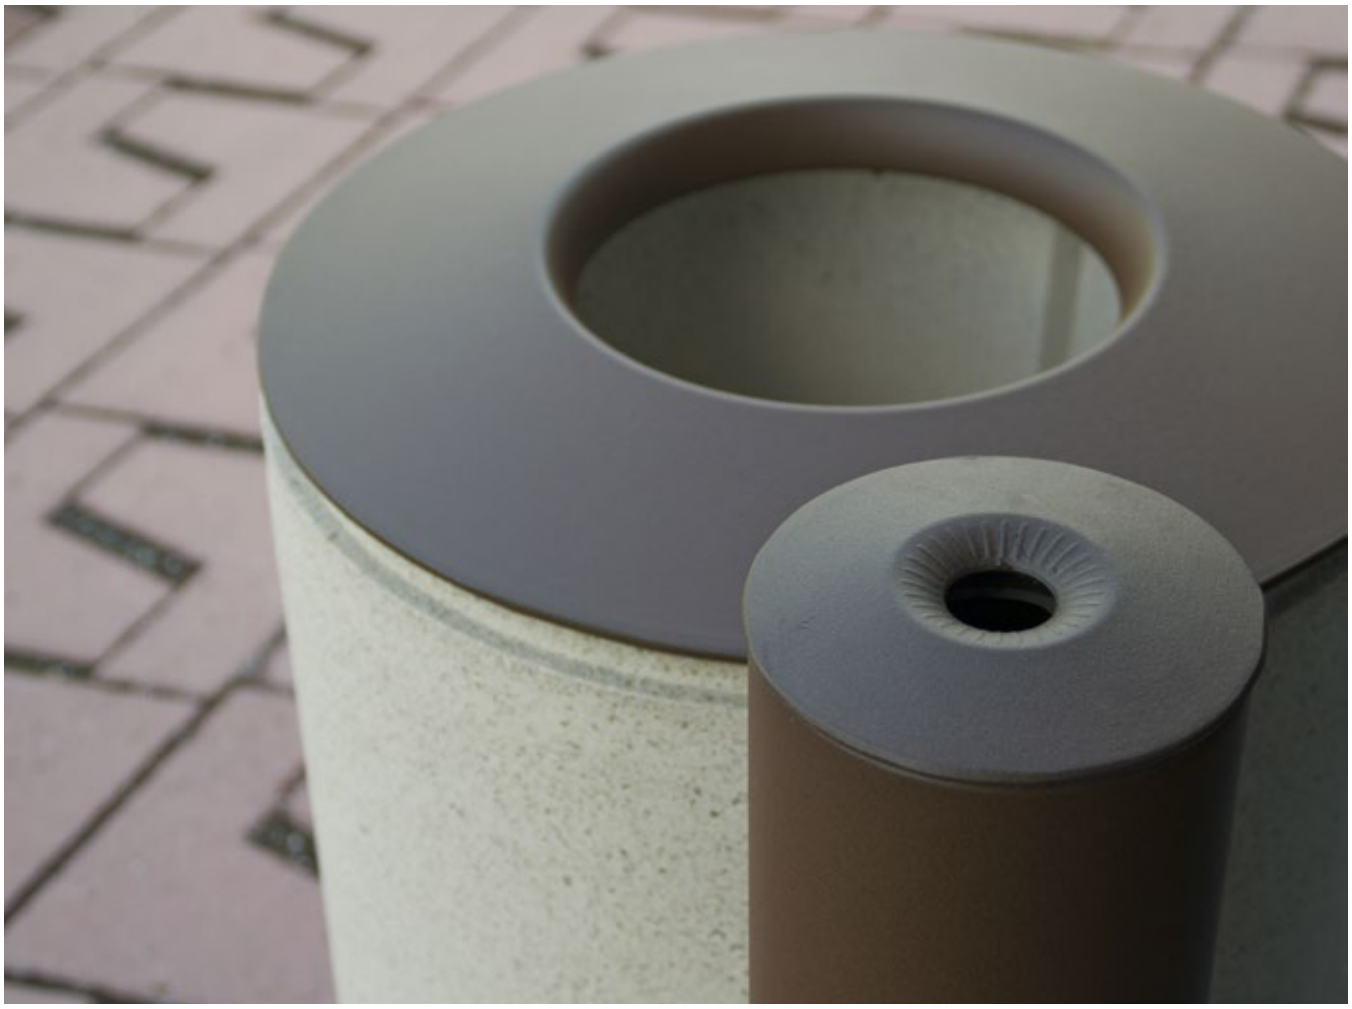

Escofet by Molins

LAUREL & HARDY

Escofet
by Molins

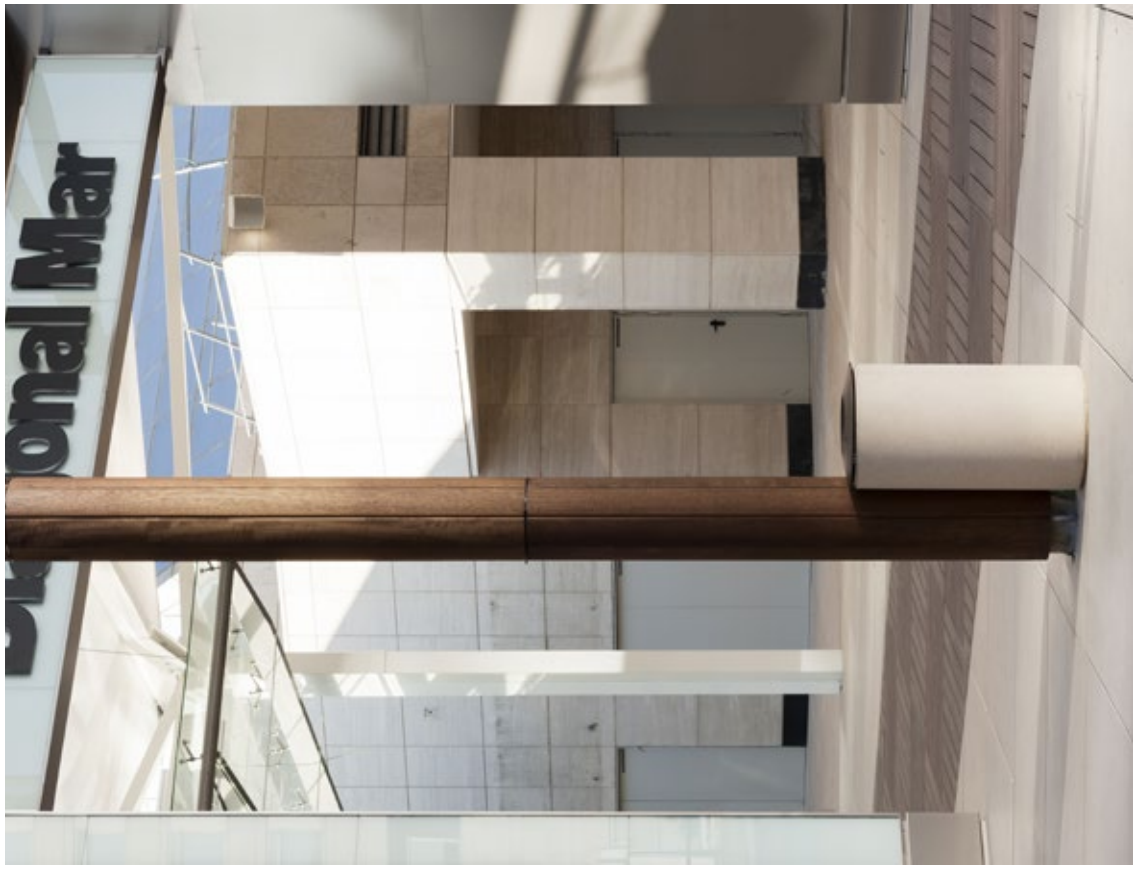










1. Litter bin

Laurel & Hardy		Hardy	Laurel & Hardy
Dimensions		Ø48 x 88.5 cm	65 x 48 x 96 cm
Weight		210 kg	240 kg
Capacity		70 L	70 L
1.1 General features			
Material	Reinforced concrete REcycled Concrete	**Fixing**	Anchored with screws
Finish	Etched and waterproofed		
Lid	Cast aluminium		
Finish	Coated finish. Category of atmospheric corrosivity C5 according to UNE EN ISO 12944-2.		


Colours




GR. Grey




NG. Black




BL. White




CA. Grey CA



RA. Red



BG. Beige



EGR. Eco-Grey®



B. Cor-ten effet aluminium



C. Textured Silver aluminium



A. Forge Black aluminium


LAUREL & HARDY


by Molins

1.2 Installation system

Hoisting
(W=210 kg / 240 kg)


Installation
Tightly screw the 3 stud bolts M-16 x140. Drill pavement (Ø 40 x 180) and fill with resin or fat morter. Center and caulk.




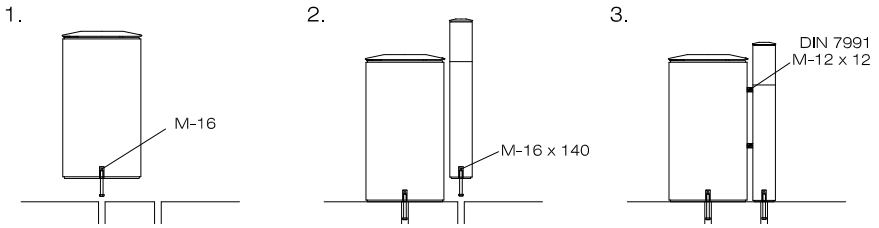


1.3 Geometría

Laurel & Hardy

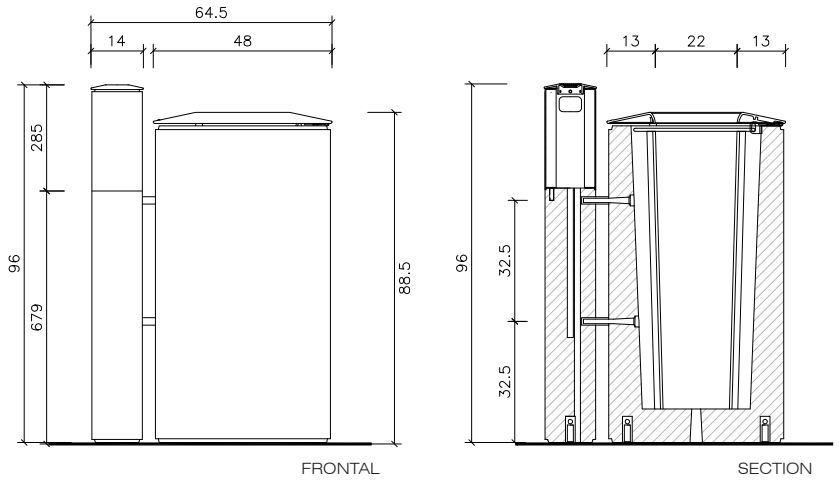

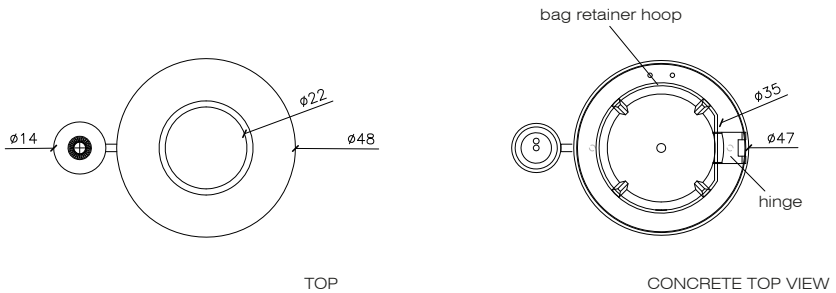

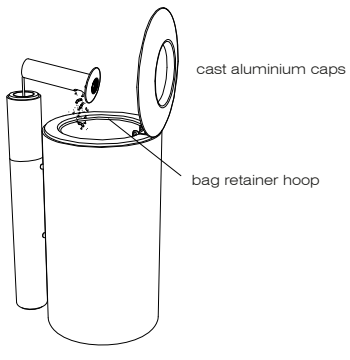

LAUREL & HARDY

escofet by Molins



Warranty

5 years in concrete elements.

The names, trade marks and industrial models of the products have been deposited in the corresponding registries. The technical information provided by Escofet about its products may be modified without prior notice.

Escofet 1886 S.A
Head office and production

Montserrat, 162
E 08760 Martorell
Barcelona - España
T. 0034 937 737 150
F. 0034 937 737 151

info@escofet.com
www.escofet.com

Escofet
by Molins

AENOR GESTIÓN AMBIENTAL ISO 14001 GA-2005/0072

AENOR SEGURIDAD Y SALUD EN EL TRABAJO ISO 45001 SST-0090/2010

AENOR GESTIÓN DE LA CALIDAD ISO 9001 ER-0403/2016

IQNET RECOGNIZED CERTIFICATION