BRISA

Brisa **is a contemporary bench designed to enhance the material and structural possibilities of the UHPC-Slimconcrete. The perforated seat brings a lightweight quality to the volume, improving its usability features, such as ventilation to mitigate high temperatures in warm sites or the rapid elimination and drying of water in wet weather conditions.**

UHPC | **220 cm** | **259 kg** | **4**

Update 24.02.2020



Escofet_lab 2019

escofet®

Origen

Its elegant appearance, a perforated bench with a minimalist design and discreet elegance, is inspired by the holes found in eroded marine rocks by the combination of the effect of the sea and the wind.

Robust

The UHPC-Slimconcrete technology allows for the design of extremely durable, lightweight elements with a minimum structural cross-section, due to their high resistance to compression, bending, impact and wear. The extremely low water absorption properties of this material improve its behaviour in the face of fragmentation due to freeze cycles in places with harsh climates.

Adaptable

Its neutral, abstract design (an evolution of the *Prima* collection) allows for its installation in any setting, either alone or aligned with other elements. The geometrical compatibility of the *Brisa* and *Prima* models means that both can be combined to form flexible alignments.

Sustainable

Its lightweight nature makes it easy to transport and reduces energy consumption in fabrication. The 100% recyclable material composition optimises its life cycle.

Material

Made from a single piece of UHPC-Slimconcrete reinforced with stainless steel and with an acid-etched waterproofed or soft polished finish, in accordance with the standard Escofet colour chart.

Installation

Easy to lift and handle with slings or a forklift truck and can be anchored to the paving.



BRISA

fscofet®

1. **Backless bench**


BRISA

Brisa	
Dimensions	220 x 60 x 45 cm
Weight	259 kg

1.1 General features

Material	UHPC Concrete	**Fixing**	Anchored with screws
Finish	Etched and waterproofed		


Colors




UHPC GR. Grey



UHPC NG. Black



UHPC BL. White




UHPC BG. Beige


1.2 Installation system

Hoisting
(P=259 kg)

Installation
Tightly screw the 4 bolts M-12x140, then, drill pavement (Ø40x180) and fill with resin and finally, center and place.

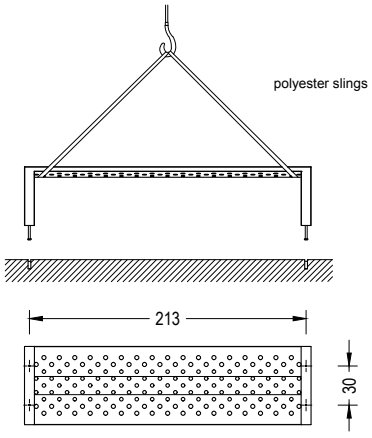


Lift bench by interposing wooden boards that support bench by means of two rests placed at 1,4 m distance from each other.

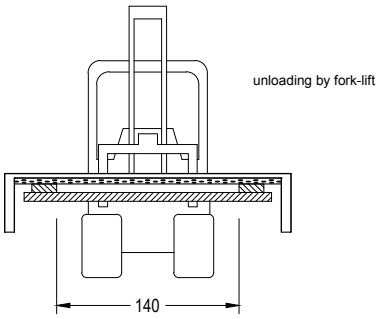

fscofet®


1.3 Geometry

Brisa

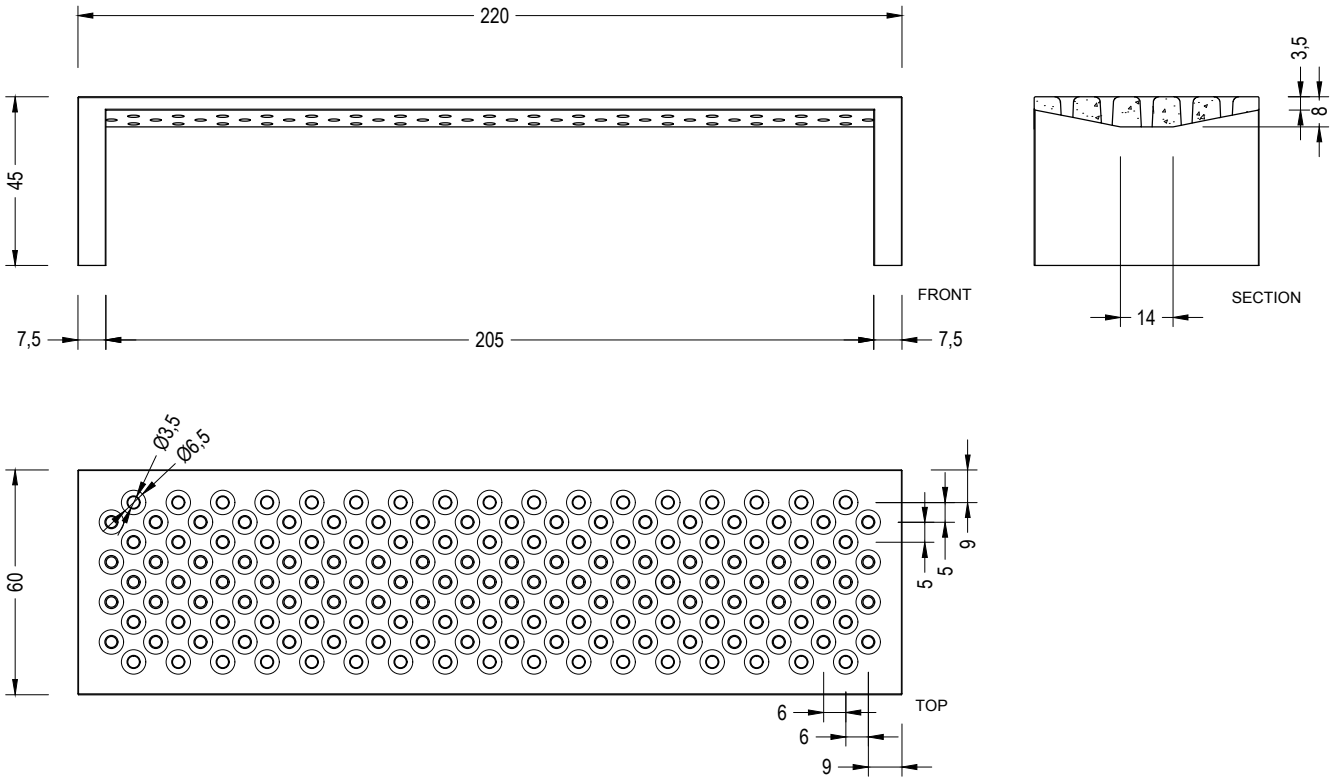

Aggregation



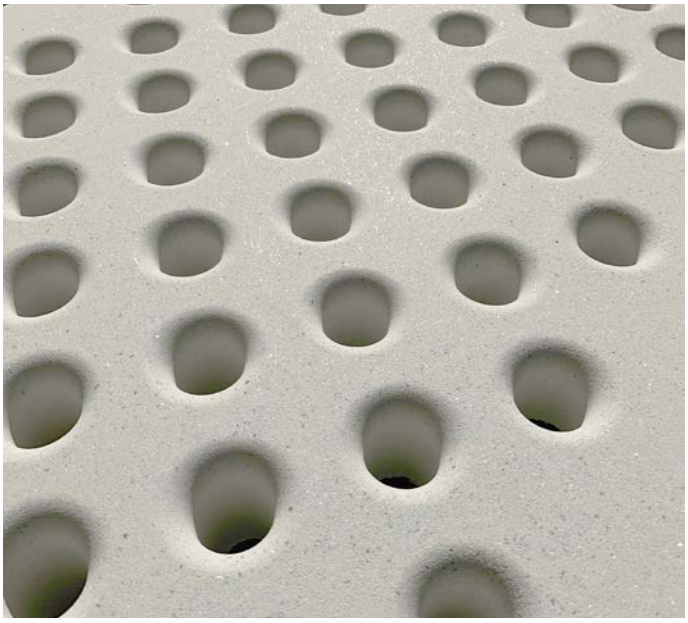

Warranty

5 years in all its components.

The names, trademarks and industrial models of the products have been logged in the corresponding registers. The technical information provided by Escofet about its products can be modified without prior notice.

Escofet 1886 S.A
Head office and production

Montserrat, 162
E 08760 Martorell
Barcelona - España
T. 0034 937 737 150
F. 0034 937 737 151

info@escofet.com
www.escofet.com

GA-2005/0072 SST-0090/2010 ER-0403/2016