CREATIVE LANDSCAPING WORKS

074 920 5039
info@creativelandscapingworks.com
www.creativelandscapingworks.com

kellen from HARDSCAPE

Manufactured Paving / Kellen / Double XL Slabs

Double XL Standard

Facet Edge Reinforced | 1990x1990x160

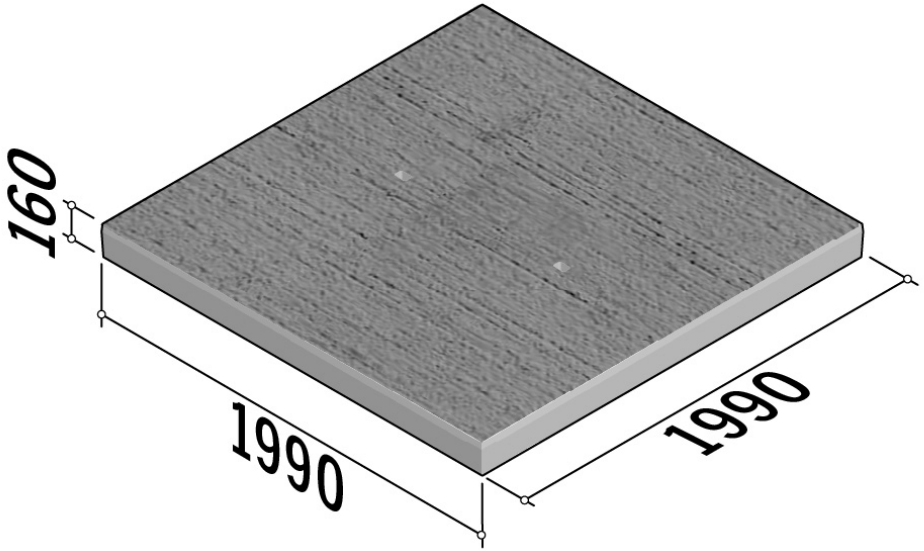

SPECIFICATION

Double XL Standard | Facet Edge Reinforced | 1990x1990x160

SKU: KEL-SLA-DXL-015

Material	Concrete
Finish	Brushed DXL
Size	1990(w) x 1990(l) x 160(d)
Weight Per Unit	1539kg
Manufacturing Standard	BS EN 1338:2003
Density	2350 kg/m³
GWP (total) kgCO2e	163.99 kgCO2e/unit
Dutch Ref.	VLOERPLAAT FACETRAND CONSTRUCTIEF-199x199x16
Position	-
Radius	-
Edge Style	10x10mm
Fitted With	With lifting tubes.
Further Information	Top & bottom structurally reinforced. VOSB load class 600+; Axle Loads 25 tonnes; Forklift (solid tires) 14.5 tonnes; Forklift (pneumatic tires) 14.5 tonnes; Point loads 10.5 tonnes

Available in a range of colours

Specification & technical data is indicative and subject to change. Images are for illustrative purposes only, details may vary. Some data may vary according to colour / material / finish variation.