
HARDSCAPE PRODUCTS

www.hardscapeproducts.co.uk
Telephone: 01204 565 500 **Email:** enq@hardscape.co.uk
Hardscape Products Ltd., Eagley House, Deakins Business Park, Egerton, Bolton, Lancashire, BL7 9RP

Natural Stone / Granite / China / Royal | Grey

Royal
Grey

Widely across the UK, with it's subtle grey and soft variations bringing style to any project.

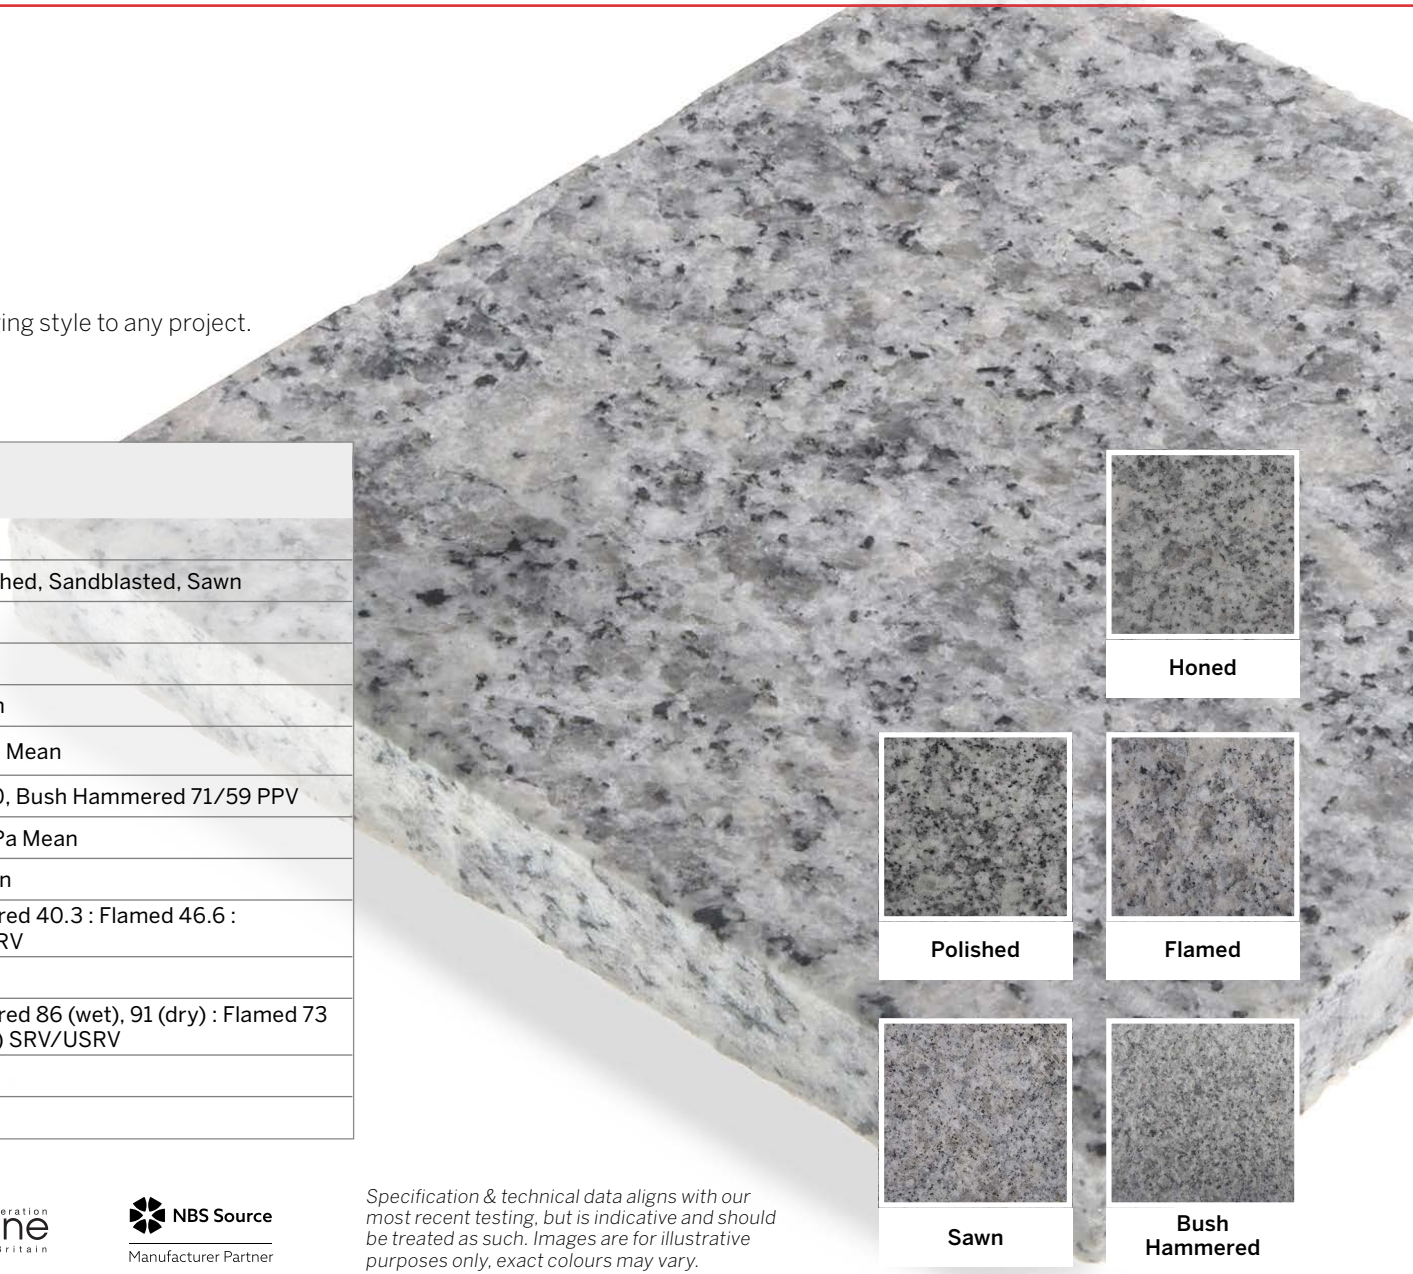

SPECIFICATION	SKU: GRA-CHI-MAG-039	
Material	Granite	
Finish	Bush Hammered, Flamed, Honed, Polished, Sandblasted, Sawn	
Density	-	2630 per kg
GWP (total) kgCO2e	ISO 14025 / EN 15804	0.129 per kg
Compressive Strength	BS EN 1926:2006	174 MPa Mean
Compressive Strength (Freeze/Thaw Resistance)	BS EN 1926:2006	174 / 179 MPa Mean
PPV (Before/After)	BS EN 7932:2003	Flamed 73/60, Bush Hammered 71/59 PPV
Flexural Freeze/Thaw	BS EN 12371:2010	13.8 / 16.5 MPa Mean
Flexural Strength	BS EN 12372:2006	15.7 MPa Mean
Light Reflectance Value	BS EN 84369:2008	Bush Hammered 40.3 : Flamed 46.6 : Honed 44.7 LRV
Open Porosity	BS EN 1936:2006	0.88%
Slip Resistance	BS EN 13036-4, BS 7976	Bush Hammered 86 (wet), 91 (dry) : Flamed 73 (wet), 83 (dry) SRV/USRV
Water Absorption	BS EN 13755:2008	0.3%
Abrasion Resistance	BS EN 14157:2004	19.3mm

CfA ISO 14001 Quality Management UKAS 0120

CfA ISO 9001 Environmental Management UKAS 0120

Ethical Stone Register Declaration Level

Federation Stone Great Britain

NBS Source Manufacturer Partner

Specification & technical data aligns with our most recent testing, but is indicative and should be treated as such. Images are for illustrative purposes only, exact colours may vary.