CREATIVE LANDSCAPING WORKS


074 920 5039
info@creativelandscapingworks.com
www.creativelandscapingworks.com

kellen from HARDSCAPE

Manufactured Paving / Kellen / Double XL Slabs

Double XL Standard

Corner Edge | 1995x995x140

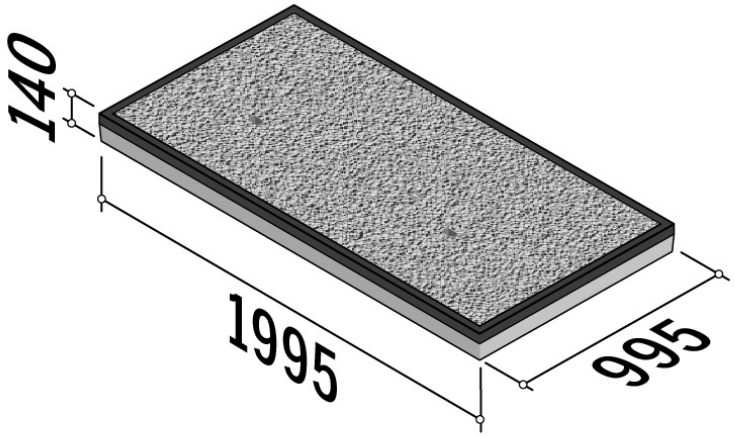

SPECIFICATION

Double XL Standard | Corner Edge | 1995x995x140

SKU: KEL-SLA-DXL-020

Material	Concrete
Finish	RAS Anti-Slip DXL
Size	1995(w) x 995(l) x 140(d)
Weight Per Unit	688kg
Manufacturing Standard	BS EN 1338:2003
Density	2350 kg/m³
GWP (total) kgCO2e	73.31 kgCO2e/unit
Dutch Ref.	VLOERPLAAT HOEKRAND-199.5x99.5x14
Position	-
Radius	-
Edge Style	Angled metal edge
Fitted With	Available with or without lifting tubes.
Further Information	Single mesh non-structural reinforcement. VOSB load class 450; Axle Loads 15 tonnes; Forklift (solid tires) 9 tonnes; Forklift (pneumatic tires) 10.7 tonnes; Point loads 6 tonnes

Available in a range of colours

View product online at : https://hardscape.co.uk/product/Double-XL-Standard-Corner-Edge-1995x995x140/

Specification & technical data is indicative and subject to change. Images are for illustrative purposes only, details may vary. Some data may vary according to colour / material / finish variation.